


Arcway-208 Distribution Switchboard

Manufacturer: Veylan Arcworks
Product family: Arcway-208 Distribution Switchboard
Application: indoor service distribution for commercial/industrial service.

Project: Asterquay Learning Workshop
Equipment Tag: MSB-1 | Spec Section: 26 24 13
Submittal: SUB-262413-001 | Rev: 02 (Final)

1. PRODUCT OVERVIEW & MECHANICAL CONSTRUCTION

- Enclosure: indoor, floor-mounted steel assembly with front service access.
- Main protective device: molded-case main breaker sized by the final design load.
- Branch positions: configurable to suit the listed feeder breaker schedule.
- Short-circuit rating: selected during engineered configuration for the application.
- Product drawings: issued after order configuration review.

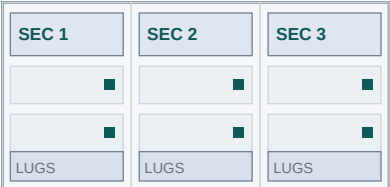

2. ELECTRICAL RATINGS & OPERATING PARAMETERS

SPECIFICATION PARAMETER	SUBMITTED RATINGS & EQUIPMENT CHARACTERISTICS
ELECTRICAL DATA	Nominal system: 208V, 3-phase, 4-wire.
Bus arrangement	copper main bus with full neutral and ground bars.
Short-circuit rating	65 kAIC symmetrical; braced for available fault current.
Main disconnect	Molded-case circuit breaker with electronic trip unit.
Branch positions	Configurable chassis supporting thermal-magnetic & electronic breakers.
Enclosure construction	NEMA Type 1 indoor, heavy-gauge formed steel with front service access.
Industry standards	UL 891 Dead-Front Switchboards, NEMA PB 2, NFPA 70 (NEC).

3. FIELD CONNECTION DATA & TERMINATION RATINGS

FIELD CONNECTION PARAMETER	SUBMITTAL REQUIREMENT & FIELD PROVISION
FIELD CONNECTION DATA	Field conductor terminations: 90 deg C minimum.
Accepted conductor material	copper conductors within the marked lug range.
Installation access	front removable barriers support routine field landing work.
Torque information	ship a terminal schedule with the configured assembly.
Terminal lug types	Mechanical set-screw and compression terminal lugs rated 600V.

4. NAMEPLATES, DRAWINGS & QUALITY DOCUMENTATION

- Provide equipment identification and breaker labels with the final shipment.
- Provide a wiring diagram that identifies all main and feeder field connections.
- Provide factory routine test documentation for the completed assembly.

CONTRACTOR & ENGINEER SUBMITTAL REVIEW STAMP	
PROJECT: Asterquay Learning Workshop SPEC SECTION: 26 24 13 (Distribution Switchboards) EQUIPMENT TAG: MSB-1	STATUS: SUBMITTED WITH VARIANCES NOTED SUBMITTAL NO: SUB-262413-001 REV: 02 REVIEW DATE: August 20, 2026 ACTION: APPROVED AS NOTED